EXT-10GbE

LAN Extension Module Card
Peripheral

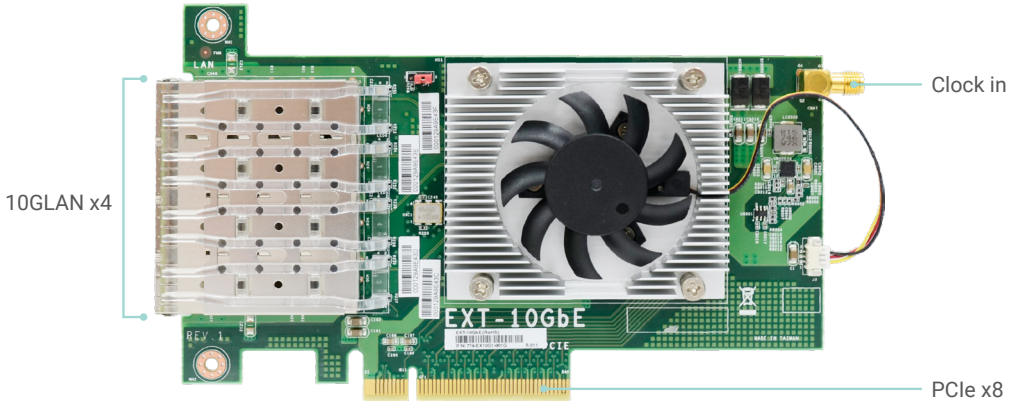

MECHANICAL DRAWING

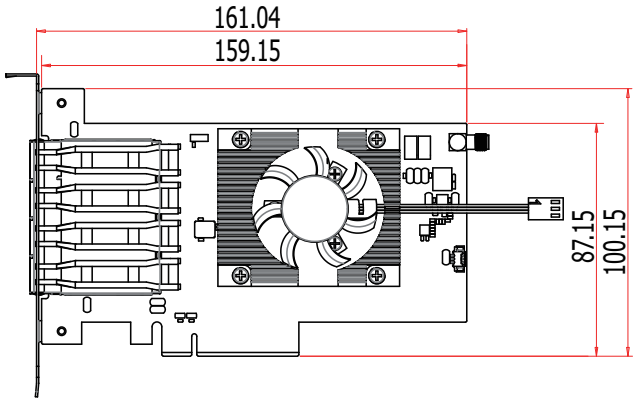

KEY FEATURES

CHIP	XL710-BM1
MODE	10GbE
PORTS	4 x 10GbE SFP+
INPUT INTERFACE	PCIe Gen3 x8
FORM FACTOR	PCIe x8

SPECIFICATION

CONTROLLER	Intel® XL710
I/O CONNECTORS	4 x 10GbE SFP+
APPLIED MODELS	SO630
POWER	12V 9W
MECHANICAL DESIGN	161.04 x 100.15mm
TEMPERATURE	Operating temp.: 0 to 55°C Storage temp.: -40 to 85°C
HUMIDITY	Operating: 5% to 95% non-condensing Storage: 5% to 95% non-condensing
FORM FACTOR	PCIe x8
REGULATION	CE, FCC class B, RoHS
COMPATIBILITY	Win10 x64 / WinSVR2016/ WinSVR2019/ Ubuntu18.04

ORDERING INFORMATION

Model Name	P/N	10GbE	Temp
EXT-10GbE	770-EX10G1-001G	4	0~55°C

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies. © September 24, 2024 DFI Inc.